

SACRIA

SCGT15-18-20

COMPACTOR

VERSATILE MOBILE COMPACTORS WITH PENDULUM RAM DESIGNED FOR WET WASTE

Convenient fully automated waste compaction solution. The SCGT compactors are liquid tight and especially designed for wet and organic waste. Our mobile compactors are easy to relocate and they take up about the same space as a standard container, yet provide powerful compaction and can hold up to 6 times more material.



Automatic solution



30 m³/HOUR
CAPACITY (UP TO)
CARDBOARD

Optimal features

WELL PROVEN TECHNOLOGY

reliable and sturdy compactors; design and production based on long experience

SMALL FOOTPRINT

compact machine design for placement where the space is limited

EASY ACCESS TO VITAL PARTS

for service and maintenance

DESIGNED FOR WET WASTE

liquid tight and no contact between waste and vital machine parts

SAFETY LOCKING SYSTEM

on the back door

FULL BIN INDICATOR

light flashes when the bin is 3/4 full

HOUR COUNTER & ELECTRIC OIL LEVEL SENSOR



Benefits for you

- + Reduction of transportation costs
- + Optimal use of transport capacity
- + Increased productivity thanks to the automated process
- + Efficient and convenient waste handling for the staff

SACRIA

SCGT 15-18-20



IDEAL FOR WET WASTE

The SCGT compactors are a hygienic and ideal for wet and organic waste from restaurants, professional kitchens, supermarkets, hospitals and institutions. The liquid tight design is leak-proof, the compactor is equipped with a pendulum ram and there is no contact between the waste and machine parts such as the cylinders, couplings and hoses. Complement with an ozone generator for additional odor prevention.

OPTIONS

- + REMOTE CONTROL
- + BIN LIFTER
- + COOLING & HEATING SYSTEMS
- + HOPPERS
- + OZONE GENERATOR
- + WALL CONNECTION
- + RAL COLOUR OF YOUR CHOICE

Numerous adaptations and more options on demand

PORTABLE UNIT

The entire unit is portable. It rests on two reinforced beams for maximum stability during the loading and unloading of the compactor.


SAFETY ENSURED

The safety of the main components of the compactor is enhanced by safety locking devices, an electric oil level sensor and a hose protection by two steel braids. Our equipment conforms to the safety standards CE, AFNOR and INRS.

DIMENSIONS & SPECIFICATIONS

DIMENSIONS (mm)

	SCGT 15	SCGT 18	SCGT 20
Length	4911	5711	6111
Width	2350	2550	2550
Height	2725	2725	2725

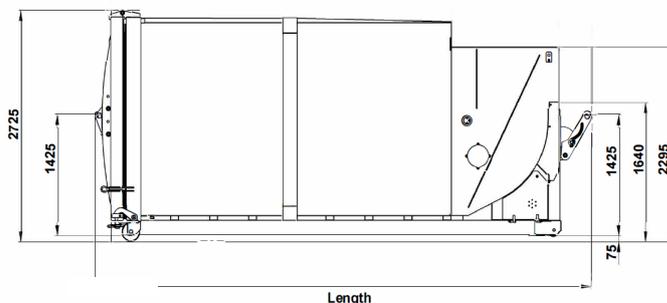

TECHNICAL DATA

MODEL	SCGT 15	SCGT 18	SCGT 20
Container volume (m³)	15	18	20
Loading aperture (mm)	1710x1200	1710x1200	1710x1200
Loading height (mm)	1595	1595	1595
Infeed capacity (m³)	1.3	1.3	1.3
Press force (t)	30	30	30
Motor (kW / Hp)	7.5	7.5	7.5
Surface pressure (kg/cm²)	3.4	3.4	3.4
Cycle time (s)	24	24	24
Operating power*	3x400 V	3x400 V	3x400 V

We reserve the right to make changes to specifications without prior notice. *Other voltages are available on demand