

SAPHIR 15 AT

HORIZONTAL

CENTRALIZED WASTE HANDLING

Our fully automated horizontal 15 ton baler provides effective compaction where space is limited. The baler can be delivered in three parts for easier internal transportation. We provide well-proven technology for special demands! The automatic tying and continuous baling allows multi-shift operation.



**Automatic
solution**



0.5-2 T/H

CAPACITY
CARDBOARD

150 KG

BALE WEIGHT (UP TO)
CARDBOARD

Optimal features

WELL PROVEN TECHNOLOGY

based on more than 50 years of experience

AUTO START

equipped with photocell start as standard

HIGH SPEED

fast throughput of the material

ADJUSTABLE BALE LENGTH

individual settings to meet your needs

CHOICE BETWEEN VERTICAL & HORIZONTAL AUTOMATIC TYING

great versatility to bale different sorts of material



Benefits for you

- + Enhanced productivity thanks to the automated process
- + Improved internal and external logistics
- + Safe and comfortable working environment
- + More profitable waste management and increased income from sales of recyclables

SAPHIR

15 AT

Smart fully automated solution

OPTIMIZED FOR:

PAPER

- + Paper sacks
- + Shredded paper
- + Cardboard

PLASTIC

- + PET

COMPACT AND CLEVER DESIGN

This compact baler fits where you need it to be! On demand, it can also be delivered in three parts for easier transportation to the installation site.

CONTINUOUS FEEDING AND OUTPUT


A completely automated waste management solution designed for continuous infeed, automatic horizontal or vertical strapping system with adjustable wire links, which enables you to yield optimal output.

A VARIETY OF INFEED OPTIONS

To fit the conditions in your environment, our horizontal balers offer a wide choice of infeed systems: manual, by bin, air-transport and conveyor belt.

Our balers can also easily be equipped with shredders, bottle presses, rufflers, strippers and different types of hoppers.

HORIZONTAL 15 AT

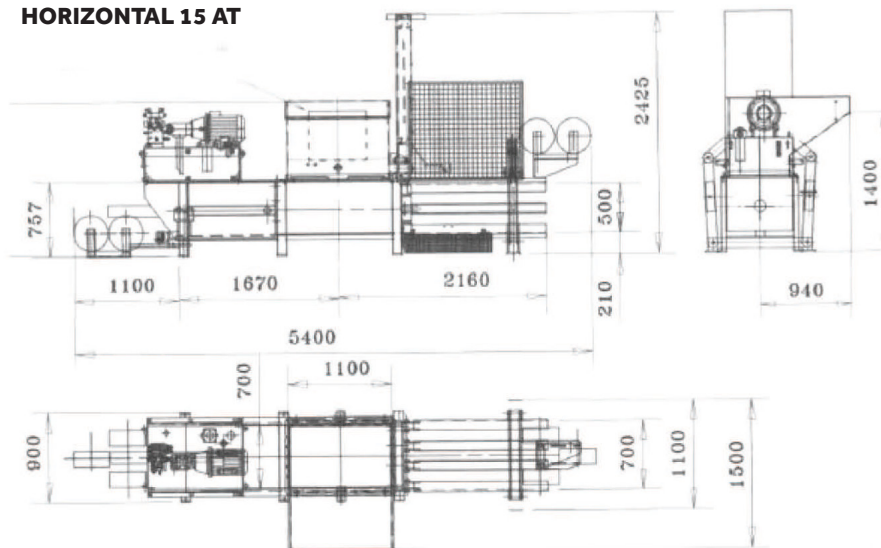

OPTIONS

- + HORIZONTAL TYING
 - + BIN LIFTER
 - + CONVEYOR BELT
 - + COOLING & HEATING SYSTEMS
- More special options on demand*

DIMENSIONS & SPECIFICATIONS

TECHNICAL DATA

MODEL	15 AT
Machine dimensions (LxWxH mm without bale exit)	5400x1100x2430
Feed opening (mm)	1100x700
Infeed capacity (m ³)	0.35
Press force (t)	15
Motor (kW / Hp)	7.5/10
Surface pressure (kg/cm ²)	4.28
Cycles per minute	4
Channel section (mm)	700x500
Oil tank capacity (L)	250
Total machine weight (kg)	2000
Theoretical output (m ³ /h)	84
Loading output (m ³ /h)	50
Automatic binding	3 wires Ø 2.7
Bale size (mm)	700x500x
adjustable length (mm)	600-1200
Bale weight cardboard (kg)	80-150 kg
<i>depends on bale length</i>	



OPTION: CONVEYOR BELT



OPTION: BIN LIFTER

We reserve the right to make changes to specifications without prior notice. Bale weights are dependent upon material type.